


**GP grade**
**For universal application**
**Construction**

- Charge-discharge proof, polar
- Aluminum case, fully insulated
- Snap-in solder pins to hold component in place on PC-board
- Minus pole marking on case surface
- Minus pole not insulated from case



KAL0274-A

**Terminals**

- Standard version with 2 terminals  
2 lengths available: 6,3 and 4,5 mm
- 3 terminals (terminal arrangement ensures correct insertion)

**Features**


- High ripple current capability
- High  $CU$  product, i. e. extremely compact
- Different case sizes available for each capacitance value

**Applications**


- Switch-mode power supplies in industrial and entertainment electronics

**Specifications and characteristics in brief**

|   | B 41 303  | B 43 303   |
|---|---|--|
| Rated voltage $U_R$                         | 10 ... 100 V-   | 200 ... 550 V-   |
| Surge voltage $U_S$                         | $1,15 \cdot U_R$  | $1,15 \cdot U_R$ (for $U_R \leq 250$ V-)<br>$1,10 \cdot U_R$ (for $U_R \geq 385$ V-) |
| Rated capacitance $C_R$                     | 680 ... 47 000 $\mu$ F  | 15 ... 1 500 $\mu$ F   |
| Capacitance tolerance                       | $\pm 20 \% \triangleq M$  | $\pm 20 \% \triangleq M$   |
| Useful life                                 |   |  |
| 40 °C, $U_R$                                | $> 100\,000$ h ( $1,3 \cdot I_{-R,85^\circ C}$ )  | $> 100\,000$ h ( $1,3 \cdot I_{-R,85^\circ C}$ )                                     |
| 85 °C, $U_R$ ; $I_{-R}$                     | $> 2\,000$ h  | $> 2\,000$ h   |
| Failure percentage                          | $\leq 1 \%$<br>(during useful life)   | $\leq 1 \%$<br>(during useful life)  |
| Failure rate                                | $\leq 100$ fit<br>( $\leq 100 \cdot 10^{-9}/h$ )  | $\leq 100$ fit<br>( $\leq 100 \cdot 10^{-9}/h$ )                                     |
| Voltage endurance test                      | 2 000 h, 85 °C<br>(at $U_R$ )   | 2 000 h, 85 °C<br>(at $U_R$ )  |
| Leakage current $I_{lka}$<br>(5 min, 20 °C) | $I_{lka} \leq 0,3 \mu A \cdot \left( \frac{C_R}{\mu F} \cdot \frac{U_R}{V} \right)^{0,7} + 4 \mu A$ |  |


**B 41 303**
**B 43 303**
**Specifications and characteristics in brief**


|                           | B 41 303  | B 43 303   |
|---------------------------|---|--|
| Self-inductance $L_{ESL}$ | approx. 20 nH   |  |
| IEC climatic category     | in accordance with IEC 68-1<br>40/085/56 (-40 °C/+85 °C,<br>56 days damp heat test)   | 25/085/56 (-25 °C/+85 °C,<br>56 days damp heat test) |
| Detail specification      | similar to CECC 30 301-806  |  |
| Sectional specification   | IEC 384-4   |  |
| Vibration resistance      | in accordance with IEC 68-2-6, test Fc:<br>displacement amplitude 0,35 mm, frequency range 10 ... 55 Hz,<br>acceleration max. 5 g, duration 3 × 2 h |  |



B 41 303

B 43 303

**Dimensional drawings**

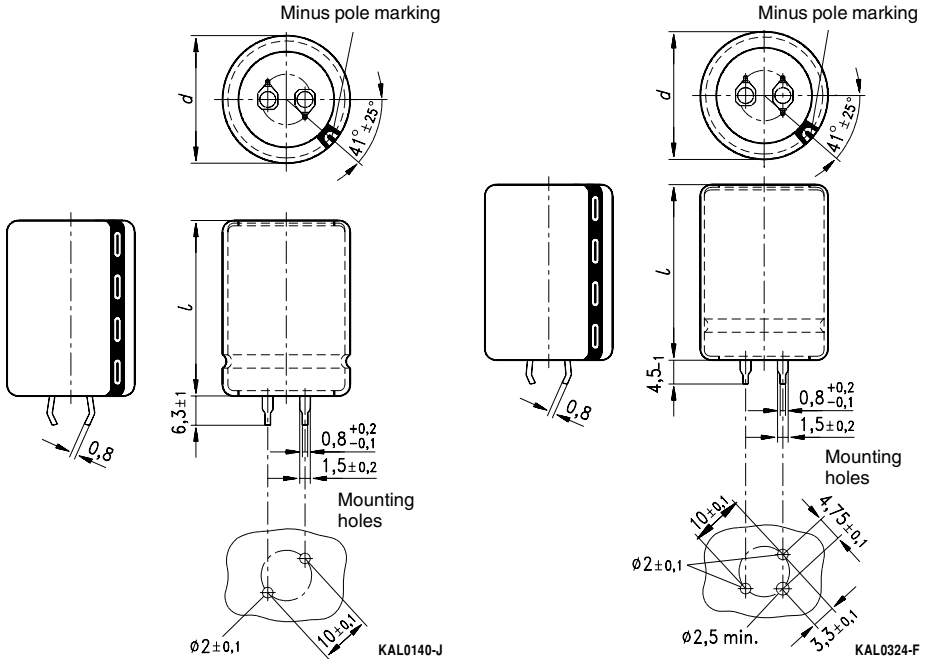


Snap-in terminals, standard (length  $6,3 \pm 1$  mm). Also available in a shorter version with a length of  $4,5 - 1$  mm. For packing mode and ordering example [see next page](#).

Snap-in capacitors are also available with 3 terminals. For packing mode and ordering example [see next page](#).

| Dimensions (mm) |           | Approx. weight (g) | Packing units (pieces) |
|-----------------|-----------|--------------------|------------------------|
| $d + 1$         | $l \pm 2$ |                    |                        |
| 22              | 25        | 9                  | 160                    |
| 22              | 30        | 12                 | 160                    |
| 22              | 35        | 15                 | 160                    |
| 22              | 40        | 18                 | 160                    |
| 22              | 45        | 20                 | 160                    |
| <hr/>           |           |                    |                        |
| 25              | 25        | 13                 | 130                    |
| 25              | 30        | 17                 | 130                    |
| 25              | 35        | 19                 | 130                    |
| 25              | 40        | 22                 | 130                    |
| 25              | 45        | 25                 | 130                    |

| Dimensions (mm) |           | Approx. weight (g) | Packing units (pieces) |
|-----------------|-----------|--------------------|------------------------|
| $d + 1$         | $l \pm 2$ |                    |                        |
| 30              | 20        | 14                 | 80                     |
| 30              | 25        | 17                 | 80                     |
| 30              | 30        | 23                 | 80                     |
| 30              | 35        | 29                 | 80                     |
| 30              | 40        | 36                 | 80                     |
| 30              | 45        | 41                 | 80                     |
| 30              | 50        | 46                 | 80                     |
| <hr/>           |           |                    |                        |
| 35              | 20        | 19                 | 60                     |
| 35              | 40        | 44                 | 60                     |
| 35              | 45        | 52                 | 60                     |
| 35              | 50        | 59                 | 60                     |
| 35              | 55        | 66                 | 60                     |



Packing

B 41 303

B 43 303

### Packing of snap-in capacitors



For ecological reasons the packing is pure cardboard. Components can be withdrawn (in full or in part) in the correct position for insertion.

### Ordering codes

| Snap-in terminals<br>Version    | Identification in 3rd block of ordering code |
|---------------------------------|--|
| Standard terminals (6,3 ± 1) mm | -M   |
| Short terminals (4,5 – 1) mm    | -M7  |
| 3 terminals                     | -M2  |


Ordering example:

B41303-A3109-M7 } snap-in capacitor with short terminals  
 B41303-A3109-M2 } snap-in capacitor with 3 terminals


**Overview of available types**
**Type B 41 303**

| $U_R$ (V-)       | 10                                | 16                 | 25                 | 40                 | 63                 | 100                |
|------------------|-----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| $C_R$ ( $\mu$ F) | Case dimensions $d \times l$ (mm) |                    |                    |                    |                    |                    |
| 680              |                                   |                    |                    |                    |                    | 22 × 30<br>25 × 25 |
| 1 000            |                                   |                    |                    |                    |                    | 22 × 35<br>25 × 30 |
| 1 500            |                                   |                    |                    |                    | 22 × 30<br>25 × 25 | 25 × 35<br>30 × 30 |
| 2 200            |                                   |                    |                    |                    | 22 × 35<br>25 × 30 | 30 × 35            |
| 3 300            |                                   |                    |                    | 22 × 30<br>25 × 25 | 25 × 35<br>30 × 30 | 30 × 45            |
| 4 700            |                                   |                    | 22 × 30<br>25 × 25 | 22 × 35<br>25 × 30 | 30 × 35            |                    |
| 6 800            |                                   | 22 × 30<br>25 × 25 | 22 × 35<br>25 × 30 | 25 × 40<br>30 × 30 | 30 × 45            |                    |
| 10 000           | 22 × 30<br>25 × 25                | 22 × 35<br>25 × 30 | 25 × 35<br>30 × 30 | 30 × 35            |                    |                    |
| 15 000           | 22 × 35<br>25 × 30                | 25 × 40<br>30 × 30 | 30 × 35            | 30 × 50            |                    |                    |
| 22 000           | 25 × 40<br>30 × 30                | 30 × 35            | 30 × 45            |                    |                    |                    |
| 33 000           | 30 × 35                           | 30 × 45            |                    |                    |                    |                    |
| 47 000           | 30 × 45                           |                    |                    |                    |                    |                    |

The capacitance and voltage ratings listed above are available in different cases upon request. Other voltage and capacitance ratings are also available upon request.


**Overview of available types**
**Type B 43 303**

| $U_R$ (V-)       | 200                               | 250                | 385                | 400                | 450     | 500     | 550                |
|------------------|-----------------------------------|--------------------|--------------------|--------------------|---------|---------|--------------------|
| $C_R$ ( $\mu$ F) | Case dimensions $d \times l$ (mm) |                    |                    |                    |         |         |                    |
| 15               |                                   |                    |                    |                    |         |         | 22 × 25            |
| 22               |                                   |                    |                    |                    |         | 22 × 25 | 22 × 30            |
| 33               |                                   |                    |                    |                    |         | 22 × 30 | 22 × 40<br>25 × 30 |
| 47               |                                   |                    |                    |                    |         | 22 × 40 | 25 × 40            |
| 68               |                                   |                    | 22 × 25            | 22 × 30            | 22 × 35 | 25 × 40 | 30 × 40            |
| 100              |                                   |                    | 22 × 30<br>25 × 25 | 22 × 35<br>25 × 30 | 22 × 40 | 30 × 40 | 30 × 50            |
| 120              |                                   |                    |                    | 25 × 30            | 25 × 35 |         |                    |
| 150              |                                   | 22 × 25            | 22 × 40<br>25 × 30 | 22 × 40<br>25 × 30 | 30 × 35 | 30 × 50 |                    |
| 180              |                                   |                    |                    |                    | 30 × 35 |         |                    |
| 220              | 22 × 25                           | 22 × 30<br>25 × 25 | 25 × 40<br>30 × 35 | 25 × 40<br>30 × 30 | 30 × 50 |         |                    |
| 270              |                                   |                    |                    | 30 × 35            | 30 × 45 |         |                    |
| 330              | 22 × 30<br>25 × 25                | 22 × 40<br>25 × 35 | 30 × 45            | 30 × 45            | 35 × 40 |         |                    |
| 390              |                                   |                    |                    | 30 × 45<br>35 × 40 | 35 × 45 |         |                    |
| 470              | 22 × 40<br>30 × 25                | 25 × 40<br>30 × 30 | 35 × 40            | 35 × 45            | 35 × 50 |         |                    |
| 560              |                                   |                    | 35 × 45            | 35 × 50            |         |         |                    |
| 680              | 25 × 40<br>30 × 35                | 30 × 40            |                    | 35 × 55            |         |         |                    |
| 1 000            | 30 × 45<br>35 × 40                | 35 × 45            |                    |                    |         |         |                    |
| 1 200            | 35 × 45                           | 35 × 50            |                    |                    |         |         |                    |
| 1 500            | 35 × 50                           |                    |                    |                    |         |         |                    |

The capacitance and voltage ratings listed above are available in different cases upon request. Other voltage and capacitance ratings are also available upon request.



**B 41 303**

**B 43 303**

**Technical data and ordering codes**


| $U_R$ | $C_R$ | Case dimensions<br>$d \times l$<br>mm | $R_{ESR, max}$<br>100 Hz<br>20 °C<br>mΩ | $Z_{max}$<br>10 kHz<br>20 °C<br>mΩ | $I_{~max}$<br>100 Hz<br>40 °C<br>A | $I_{~R}^{1)}$<br>100 Hz<br>85 °C<br>A | Ordering code <sup>2)</sup> |
|-------|-------|---------------------------------------|---|------------------------------------|------------------------------------|---------------------------------------|-----------------------------|
| V-    | μF    |                                       |   |                                    |                                    |                                       | Short code                  |

**B41303-**

|    |        |         |    |    |     |     |          |
|----|--------|---------|----|----|-----|-----|----------|
| 10 | 10 000 | 22 × 30 | 66 | 59 | 4,7 | 1,8 | -A3109-M |
|    | 10 000 | 25 × 25 | 66 | 59 | 4,7 | 1,8 | -J3109-M |
|    | 15 000 | 22 × 35 | 54 | 49 | 5,6 | 2,2 | -B3159-M |
|    | 15 000 | 25 × 30 | 54 | 49 | 5,6 | 2,2 | -J3159-M |
|    | 22 000 | 25 × 40 | 46 | 43 | 6,7 | 2,6 | -A3229-M |
|    | 22 000 | 30 × 30 | 46 | 43 | 6,7 | 2,6 | -J3229-M |
|    | 33 000 | 30 × 35 | 41 | 39 | 7,3 | 2,8 | -B3339-M |
|    | 47 000 | 30 × 45 | 38 | 36 | 8,3 | 3,2 | -B3479-M |
| 16 | 6 800  | 22 × 30 | 71 | 59 | 4,5 | 1,8 | -A4688-M |
|    | 6 800  | 25 × 25 | 71 | 59 | 4,5 | 1,8 | -J4688-M |
|    | 10 000 | 22 × 35 | 58 | 52 | 5,2 | 2,0 | -B4109-M |
|    | 10 000 | 25 × 30 | 58 | 52 | 5,2 | 2,0 | -J4109-M |
|    | 15 000 | 25 × 40 | 49 | 45 | 6,4 | 2,5 | -A4159-M |
|    | 15 000 | 30 × 30 | 49 | 45 | 6,4 | 2,5 | -J4159-M |
|    | 22 000 | 30 × 35 | 43 | 40 | 7,3 | 2,8 | -B4229-M |
|    | 33 000 | 30 × 45 | 39 | 37 | 8,1 | 3,1 | -B4339-M |
| 25 | 4 700  | 22 × 30 | 77 | 67 | 4,4 | 1,7 | -A5478-M |
|    | 4 700  | 25 × 25 | 77 | 67 | 4,4 | 1,7 | -J5478-M |
|    | 6 800  | 22 × 35 | 62 | 56 | 4,9 | 1,9 | -B5688-M |
|    | 6 800  | 25 × 30 | 62 | 56 | 4,9 | 1,9 | -J5688-M |
|    | 10 000 | 25 × 35 | 52 | 48 | 5,5 | 2,3 | -B5109-M |
|    | 10 000 | 30 × 30 | 52 | 48 | 5,5 | 2,3 | -J5109-M |
|    | 15 000 | 30 × 35 | 45 | 42 | 7,0 | 2,7 | -B5159-M |
|    | 22 000 | 30 × 45 | 40 | 38 | 8,1 | 3,1 | -B5229-M |

1) 120 Hz conversion factor of ripple current:  $I_{~} (120 \text{ Hz}) = 1,03 \cdot I_{~} (100 \text{ Hz})$

2) To obtain the required ordering code, prefix the type number to the short code. E. g.: B41303-A3109-M


**B 41 303**
**B 43 303**
**Technical data and ordering codes**

| $U_R$ | $C_R$ | Case dimensions<br>$d \times l$<br>mm | $R_{ESR, max}$<br>100 Hz<br>20 °C<br>mΩ | $Z_{max}$<br>10 kHz<br>20 °C<br>mΩ | $I_{~max}$<br>100 Hz<br>40 °C<br>A | $I_{~R}^{1)}$<br>100 Hz<br>85 °C<br>A | Ordering code <sup>2)</sup> |
|-------|-------|---------------------------------------|---|------------------------------------|------------------------------------|---------------------------------------|-----------------------------|
| V-    | μF    |                                       |   |                                    |                                    |                                       | Short code                  |


**B41303-**

|     |        |         |     |     |     |     |          |
|-----|--------|---------|-----|-----|-----|-----|----------|
| 40  | 3 300  | 22 × 30 | 77  | 71  | 4,4 | 1,7 | -A7338-M |
|     | 3 300  | 25 × 25 | 77  | 71  | 4,4 | 1,7 | -J7338-M |
|     | 4 700  | 22 × 35 | 66  | 59  | 4,9 | 1,9 | -B7478-M |
|     | 4 700  | 25 × 30 | 66  | 59  | 4,9 | 1,9 | -J7478-M |
|     | 6 800  | 25 × 40 | 55  | 50  | 6,1 | 2,4 | -A7688-M |
|     | 6 800  | 30 × 30 | 55  | 50  | 6,1 | 2,4 | -J7688-M |
|     | 10 000 | 30 × 35 | 47  | 44  | 6,8 | 2,6 | -B7109-M |
|     | 15 000 | 30 × 50 | 41  | 39  | 8,4 | 3,3 | -A7159-M |
| 63  | 1 500  | 22 × 30 | 120 | 100 | 3,5 | 1,4 | -A8158-M |
|     | 1 500  | 25 × 25 | 120 | 100 | 3,5 | 1,4 | -J8158-M |
|     | 2 200  | 22 × 35 | 89  | 77  | 4,2 | 1,6 | -B8228-M |
|     | 2 200  | 25 × 30 | 89  | 77  | 4,2 | 1,6 | -J8228-M |
|     | 3 300  | 25 × 35 | 69  | 62  | 5,2 | 2,0 | -B8338-M |
|     | 3 300  | 30 × 30 | 69  | 62  | 5,2 | 2,0 | -J8338-M |
|     | 4 700  | 30 × 35 | 58  | 52  | 6,2 | 2,4 | -B8478-M |
|     | 6 800  | 30 × 45 | 49  | 45  | 7,3 | 2,8 | -B8688-M |
| 100 | 680    | 22 × 30 | 180 | 150 | 2,9 | 1,1 | -A9687-M |
|     | 680    | 25 × 25 | 180 | 150 | 2,9 | 1,1 | -J9687-M |
|     | 1 000  | 22 × 35 | 130 | 110 | 3,4 | 1,3 | -B9108-M |
|     | 1 000  | 25 × 30 | 130 | 110 | 3,4 | 1,3 | -J9108-M |
|     | 1 500  | 25 × 35 | 97  | 83  | 4,4 | 1,7 | -B9158-M |
|     | 1 500  | 30 × 30 | 97  | 83  | 4,4 | 1,7 | -J9158-M |
|     | 2 200  | 30 × 35 | 75  | 66  | 5,5 | 2,1 | -B9228-M |
|     | 3 300  | 30 × 45 | 60  | 54  | 6,5 | 2,5 | -B9338-M |

1) 120 Hz conversion factor of ripple current:  $I_{~}(120 \text{ Hz}) = 1,03 \cdot I_{~}(100 \text{ Hz})$

2) To obtain the required ordering code, prefix the type number to the short code. E. g.: B41303-A7338-M





**B 41 303**


**B 43 303**

**Technical data and ordering codes**

| $U_R$          | $C_R$   | Case dimensions<br>$d \times l$<br>mm | $R_{ESR, max}$<br>100 Hz<br>20 °C<br>mΩ | $Z_{max}$<br>10 kHz<br>20 °C<br>mΩ | $I_{~max}$<br>100 Hz<br>40 °C<br>A | $I_{~R}^{1)}$<br>100 Hz<br>85 °C<br>A | Ordering code <sup>2)</sup> |
|----------------|---------|---------------------------------------|---|------------------------------------|------------------------------------|---------------------------------------|-----------------------------|
| V-             | μF      |                                       |   |                                    |                                    |                                       | Short code                  |
| <b>B43303-</b> |         |                                       |   |                                    |                                    |                                       |                             |
| 200            | 220     | 22 × 25                               | 1250                                    | 960                                | 1,7                                | 0,77                                  | -D227-M                     |
|                | 330     | 22 × 30                               | 900                                     | 640                                | 2,2                                | 1,0                                   | -D337-M                     |
|                | 330     | 25 × 25                               | 800                                     | 640                                | 2,3                                | 1,0                                   | -M337-M                     |
|                | 470     | 22 × 40                               | 560                                     | 450                                | 2,9                                | 1,3                                   | -D477-M                     |
|                | 470     | 30 × 25                               | 560                                     | 450                                | 3,0                                | 1,3                                   | -M477-M                     |
|                | 680     | 25 × 40                               | 390                                     | 310                                | 3,8                                | 1,7                                   | -D687-M                     |
|                | 680     | 30 × 35                               | 390                                     | 310                                | 4,0                                | 1,8                                   | -M687-M                     |
|                | 1 000   | 30 × 45                               | 260                                     | 210                                | 5,3                                | 2,4                                   | -D108-M                     |
|                | 1 000   | 35 × 40                               | 260                                     | 210                                | 5,6                                | 2,5                                   | -E108-M                     |
|                | 1 200   | 35 × 45                               | 220                                     | 180                                | 6,4                                | 2,9                                   | -A128-M                     |
| 1 500          | 35 × 50 | 180                                   | 140                                     | 7,4                                | 3,3                                | -A158-M                               |                             |
| 250            | 150     | 22 × 25                               | 1400                                    | 1200                               | 1,4                                | 0,63                                  | -C2157-M                    |
|                | 220     | 22 × 30                               | 920                                     | 740                                | 1,8                                | 0,82                                  | -C2227-M                    |
|                | 220     | 25 × 25                               | 920                                     | 740                                | 1,8                                | 0,84                                  | -L2227-M                    |
|                | 330     | 22 × 40                               | 620                                     | 500                                | 2,5                                | 1,1                                   | -C2337-M                    |
|                | 330     | 25 × 35                               | 620                                     | 500                                | 2,5                                | 1,2                                   | -L2337-M                    |
|                | 470     | 25 × 40                               | 440                                     | 360                                | 3,2                                | 1,4                                   | -C2477-M                    |
|                | 470     | 30 × 30                               | 440                                     | 360                                | 3,1                                | 1,4                                   | -L2477-M                    |
|                | 680     | 30 × 40                               | 300                                     | 240                                | 4,2                                | 1,9                                   | -C2687-M                    |
|                | 1 000   | 35 × 45                               | 220                                     | 170                                | 5,8                                | 2,6                                   | -A2108-M                    |
|                | 1 200   | 35 × 50                               | 180                                     | 150                                | 6,6                                | 3,0                                   | -A2128-M                    |
| 385            | 68      | 22 × 25                               | 2700                                    | 2200                               | 1,0                                | 0,45                                  | -H686-M                     |
|                | 100     | 22 × 30                               | 1800                                    | 1500                               | 1,3                                | 0,58                                  | -H107-M                     |
|                | 100     | 25 × 25                               | 1800                                    | 1500                               | 1,3                                | 0,59                                  | -R107-M                     |
|                | 150     | 22 × 40                               | 1200                                    | 940                                | 1,7                                | 0,79                                  | -H157-M                     |
|                | 150     | 25 × 30                               | 1200                                    | 940                                | 1,7                                | 0,77                                  | -R157-M                     |
|                | 220     | 25 × 40                               | 800                                     | 640                                | 2,3                                | 1,0                                   | -H227-M                     |
|                | 220     | 30 × 35                               | 800                                     | 640                                | 2,4                                | 1,1                                   | -P227-M                     |
|                | 330     | 30 × 45                               | 540                                     | 440                                | 3,2                                | 1,4                                   | -H337-M                     |
|                | 470     | 35 × 40                               | 410                                     | 330                                | 4,1                                | 1,8                                   | -E477-M                     |
|                | 560     | 35 × 45                               | 340                                     | 280                                | 4,7                                | 2,1                                   | -A567-M                     |

1) 120 Hz conversion factor of ripple current:  $I_{~}(120 \text{ Hz}) = 1,03 \cdot I_{~}(100 \text{ Hz})$

2) To obtain the required ordering code, prefix the type number to the short code. E. g.: B43303-D227-M


**B 41 303**
**B 43 303**
**Technical data and ordering codes**

| $U_R$ | $C_R$ | Case dimensions<br>$d \times l$<br>mm | $R_{ESR, \max}$<br>100 Hz<br>20 °C<br>mΩ | $Z_{\max}$<br>10 kHz<br>20 °C<br>mΩ | $I_{\sim \max}$<br>100 Hz<br>40 °C<br>A | $I_{\sim R}^{1)}$<br>100 Hz<br>85 °C<br>A | Ordering code <sup>2)</sup> |
|-------|-------|---------------------------------------|--|-------------------------------------|---|---|-----------------------------|
| V-    | μF    |                                       |  |                                     |   |   | Short code                  |

**B43303-**

|     |     |         |      |      |     |      |          |
|-----|-----|---------|------|------|-----|------|----------|
| 400 | 68  | 22 × 30 | 2400 | 2000 | 1,0 | 0,48 | -G686-M  |
|     | 100 | 22 × 35 | 1600 | 1420 | 1,3 | 0,61 | -G107-M  |
|     | 100 | 25 × 30 | 1600 | 1420 | 1,4 | 0,63 | -Q107-M  |
|     | 120 | 25 × 30 | 1350 | 1180 | 1,5 | 0,69 | -A9127-M |
|     | 150 | 22 × 40 | 1100 | 920  | 1,7 | 0,79 | -A9157-M |
|     | 150 | 25 × 30 | 1100 | 920  | 1,7 | 0,77 | -B9157-M |
|     | 220 | 25 × 40 | 700  | 630  | 2,2 | 1,0  | -B9227-M |
|     | 220 | 30 × 30 | 700  | 630  | 2,2 | 1,0  | -A9227-M |
|     | 270 | 30 × 35 | 580  | 520  | 2,6 | 1,2  | -A9277-M |
|     | 330 | 30 × 45 | 450  | 420  | 3,2 | 1,4  | -G337-M  |
|     | 390 | 30 × 45 | 400  | 360  | 3,5 | 1,6  | -A9397-M |
|     | 390 | 35 × 40 | 440  | 350  | 3,7 | 1,7  | -A397-M  |
|     | 470 | 35 × 45 | 360  | 290  | 4,3 | 1,9  | -F477-M  |
|     | 560 | 35 × 50 | 300  | 240  | 4,9 | 2,2  | -F567-M  |
|     | 680 | 35 × 55 | 250  | 200  | 5,6 | 2,5  | -A687-M  |

1) 120 Hz conversion factor of ripple current:  $I_{\sim} (120 \text{ Hz}) = 1,03 \cdot I_{\sim} (100 \text{ Hz})$

2) To obtain the required ordering code, prefix the type number to the short code. E. g.: B43303-G686-M.



**B 41 303**

**B 43 303**

**Technical data and ordering codes**


| $U_R$ | $C_R$ | Case dimensions<br>$d \times l$<br>mm | $R_{ESR, max}$<br>100 Hz<br>20 °C<br>mΩ | $Z_{max}$<br>10 kHz<br>20 °C<br>mΩ | $I_{~max}$<br>100 Hz<br>40 °C<br>A | $I_{~R}^{1)}$<br>100 Hz<br>85 °C<br>A | Ordering code <sup>2)</sup> |
|-------|-------|---------------------------------------|---|------------------------------------|------------------------------------|---------------------------------------|-----------------------------|
| V-    | μF    |                                       |   |                                    |                                    |                                       | Short code                  |

**B43303-**

|     |         |         |       |       |      |          |          |
|-----|---------|---------|-------|-------|------|----------|----------|
| 450 | 68      | 22 × 35 | 3700  | 3080  | 1,1  | 0,50     | -A5686-M |
|     | 100     | 22 × 40 | 2500  | 2080  | 1,4  | 0,64     | -B5107-M |
|     | 120     | 25 × 35 | 2100  | 1730  | 1,6  | 0,72     | -A5127-M |
|     | 150     | 30 × 35 | 1700  | 1420  | 1,9  | 0,88     | -A5157-M |
|     | 180     | 30 × 35 | 1370  | 1180  | 2,1  | 0,97     | -A5187-M |
|     | 220     | 30 × 50 | 1200  | 1000  | 2,7  | 1,2      | -A5227-M |
|     | 270     | 30 × 45 | 910   | 790   | 2,9  | 1,3      | -A5277-M |
|     | 330     | 35 × 40 | 840   | 670   | 3,4  | 1,5      | -A5337-M |
|     | 390     | 35 × 45 | 710   | 570   | 3,9  | 1,8      | -A5397-M |
| 470 | 35 × 50 | 590     | 470   | 4,5   | 2,0  | -A5477-M |          |
| 500 | 22      | 22 × 25 | 9200  | 7700  | 0,52 | 0,24     | -A6226-M |
|     | 33      | 22 × 30 | 6200  | 5200  | 0,68 | 0,31     | -A6336-M |
|     | 47      | 22 × 40 | 4400  | 3700  | 0,91 | 0,41     | -A6476-M |
|     | 68      | 25 × 40 | 3000  | 2500  | 1,2  | 0,54     | -A6686-M |
|     | 100     | 30 × 40 | 2100  | 1800  | 1,6  | 0,71     | -A6107-M |
|     | 150     | 30 × 50 | 1400  | 1200  | 2,1  | 0,94     | -A6157-M |
| 550 | 15      | 22 × 25 | 14000 | 12000 | 0,43 | 0,20     | -A7156-M |
|     | 22      | 22 × 30 | 9200  | 7700  | 0,56 | 0,25     | -A7226-M |
|     | 33      | 22 × 40 | 6200  | 5200  | 0,76 | 0,35     | -A7336-M |
|     | 33      | 25 × 30 | 6200  | 5200  | 0,74 | 0,34     | -J7336-M |
|     | 47      | 25 × 40 | 4400  | 3700  | 0,98 | 0,45     | -A7476-M |
|     | 68      | 30 × 40 | 3000  | 2500  | 1,3  | 0,58     | -A7686-M |
|     | 100     | 30 × 50 | 2100  | 1800  | 1,7  | 0,77     | -A7107-M |

1) 120 Hz conversion factor of ripple current:  $I_{~(120\text{ Hz})} = 1,03 \cdot I_{~(100\text{ Hz})}$


2) To obtain the required ordering code, prefix the type number to the short code. E. g.: B43303-A5686-M




**Useful life**

versus ambient temperature  $T_A$  under ripple current operating conditions <sup>1)</sup>


$U_R \leq 100\text{ V}$ –

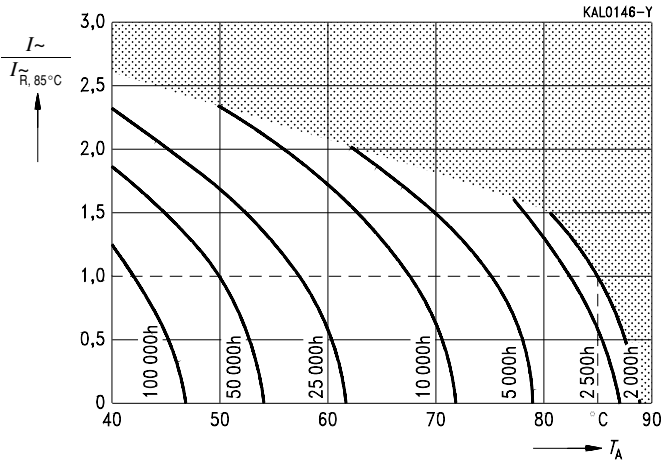

$U_R \geq 200\text{ V}$ –

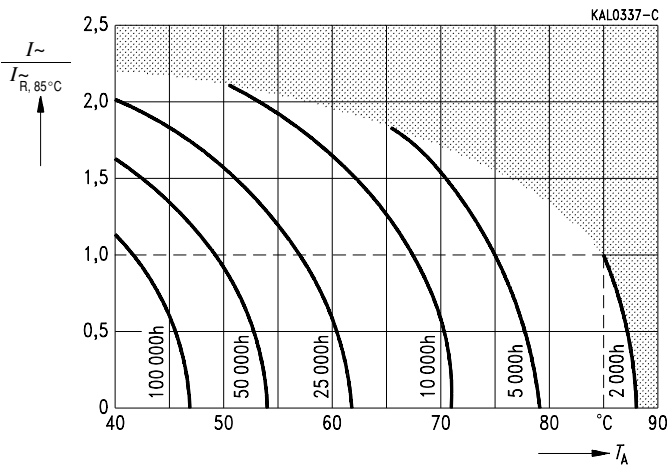

1) Refer to [page 31](#) for an explanation on how to interpret the useful life graphs.




**B 41 303**

**B 43 303**


**Permissible ripple current  $I_{\sim}$**   
versus frequency  $f$

$U_R \leq 100 \text{ V-}$

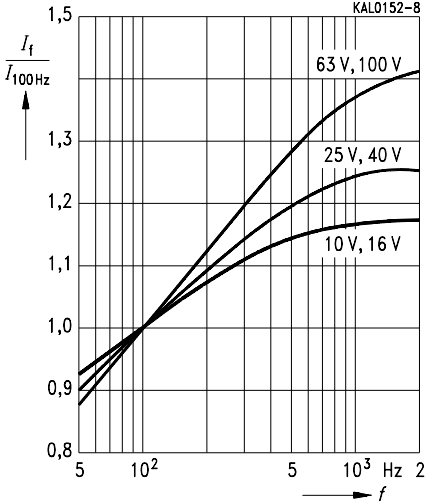

**Permissible ripple current  $I_{\sim}$**   
versus frequency  $f$

$U_R \geq 200 \text{ V-}$

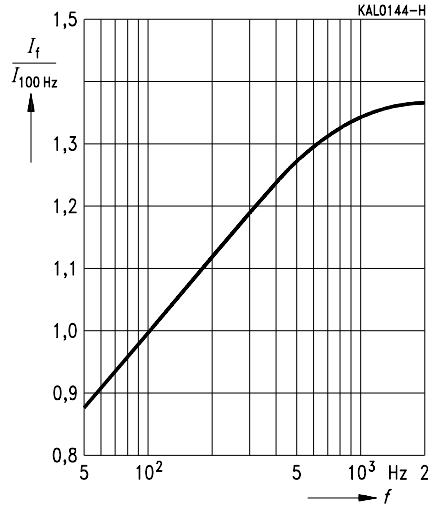


**Equivalent series resistance  $R_{ESR}$**

versus frequency  $f$

Typical behavior

$U_R \leq 100 \text{ V-}$

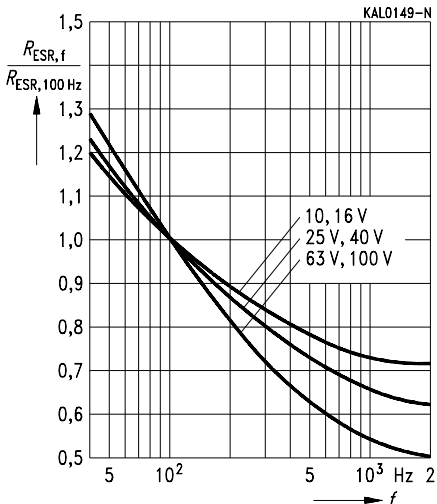



**Equivalent series resistance  $R_{ESR}$**

versus frequency  $f$


Typical behavior

$U_R \geq 200 \text{ V-}$

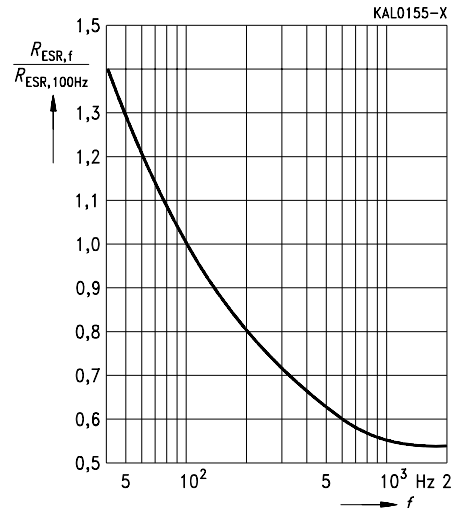




**Impedance  $Z$**   
 versus frequency  $f$   
 Typical behavior  
 $U_R \leq 100 \text{ V-}$

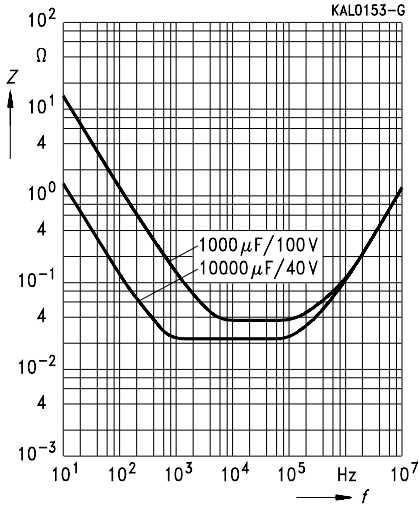

**Impedance  $Z$**   
 versus frequency  $f$   
 and temperature  $T$  for 100  $\mu\text{F}/400 \text{ V-}$   
 Typical behavior

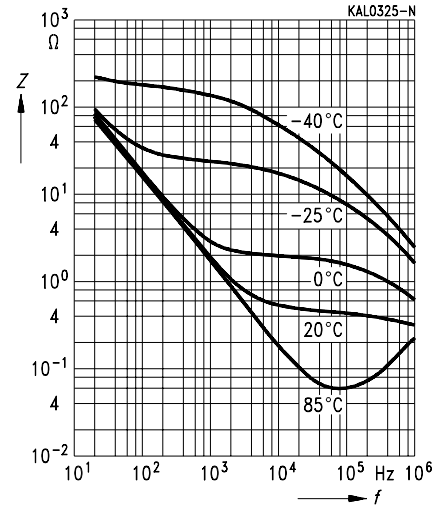

**Herausgegeben von EPCOS AG**

**Marketing Kommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND**

© EPCOS AG 2000. Alle Rechte vorbehalten. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Mit den Angaben in dieser Broschüre werden die Bauelemente spezifiziert, keine Eigenschaften zugesichert. Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland.

Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG**

**Marketing Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.