


**LL grade**

**For professional switch-mode power supplies of compact design**



KAL0275-I

**Construction**

- Charge-discharge proof, polar
- Aluminum case with insulating sleeve
- Solder pin terminals brought out at one end to fit standardized PCB spacings
- Negative potential can be applied to third pin; this pin does not serve as a minus pole, however

**Features**


- Low equivalent series resistance  $R_{ESR}$
- High reliability, high ripple current capability and small dimensions
- Long useful life
- Pinning ensures correct insertion

**Applications**

- For professional switch-mode power supplies of compact design
- General industrial electronics, telecommunications and data processing equipment

**Specifications and characteristics in brief**

	B 41 534	B 43 534
Rated voltage $U_R$	6,3 ... 100 V-	200 and 385 V-
Surge voltage $U_S$	$1,15 \cdot U_R$	$1,15 \cdot U_R$ (for $U_R \leq 200$ V-) $1,10 \cdot U_R$ (for $U_R = 385$ V-)
Rated capacitance $C_R$	100 ... 15 000 $\mu$ F	47 ... 220 $\mu$ F
Capacitance tolerance	$\pm 20\% \triangleq M$	$\pm 20\% \triangleq M$
Useful life		
40 °C, $U_R$	$> 200\,000$ h ( $1,8 \cdot I_{R,85^\circ C}$ )	$> 200\,000$ h ( $1,8 \cdot I_{R,85^\circ C}$ )
85 °C, $U_R$ ; $I_{R-}$	$> 8\,000$ h	$> 8\,000$ h
Failure percentage	$\leq 0,5\%$ (during useful life)	$\leq 0,5\%$ (during useful life)
Failure rate	$\leq 20$ fit ( $\leq 20 \cdot 10^{-9}$ /h)	$\leq 20$ fit ( $\leq 20 \cdot 10^{-9}$ /h)
Voltage endurance test	3 000 h, 85 °C (at $U_R$ )	3 000 h, 85 °C (at $U_R$ )
Leakage current $I_{ka}$ (5 min, 20 °C)	$I_{ka} \leq 0,3 \mu A \cdot \left( \frac{C_R}{\mu F} \cdot \frac{U_R}{V} \right)^{0,7} + 4 \mu A$	
Self-inductance $L_{ESL}$	approx. 10 nH	
IEC climatic category	in accordance with IEC 68-1 40/085/56 (- 40 °C/+ 85 °C, 56 days damp heat test)	




**B 41 534**  
**B 43 534**

**Not for new design**

**Specifications and characteristics in brief**

	B 41 534	B 43 534
Detail specification	—	
Sectional specification	IEC 384–4	
Vibration resistance	in accordance with IEC 68–2–6, test Fc: displacement amplitude 0,35 mm, frequency range 10 ... 55 Hz, acceleration max. 5 g, duration 3 × 2 h	

**Dimensional drawing**

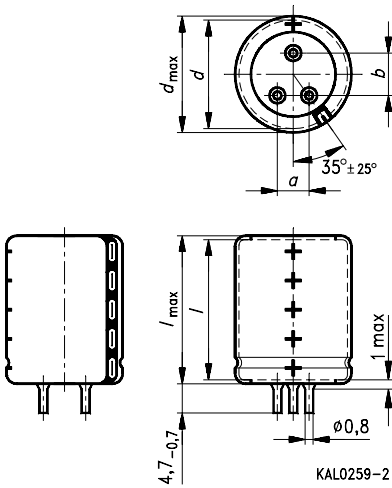

Dimensions (mm)				Approximate weight (g)	Packing units (pieces)
$d \times l$	$d_{max} \times l_{max}$	$a \begin{smallmatrix} +0,4 \\ -0,2 \end{smallmatrix}$	$b \begin{smallmatrix} +0,4 \\ -0,2 \end{smallmatrix}$		
18 × 30	18,8 × 30,5	5	7,5	11	600
18 × 40 <sup>1)</sup>	18,8 × 40,5	5	7,5	14	600
22 × 40 <sup>2)</sup>	22,8 × 40,5	7,5	10	18	256
25 × 40	25,8 × 40,5	7,5	10	26	256

1) Also available with  $d \times l = 22 \times 30$  mm  
 2) Also available with  $d \times l = 25 \times 30$  mm  
 Ordering code: B41534-J★★★★-M (6,3 ... 100 V–)  
 B43534-J★★★★-M (200 V–)  
 B43534-N★★★★-M (385 V–)



Overview of available types


Type B 41 534

$U_R$ (V-)	6,3	10	16	25	40	63	100
$C_R$ ( $\mu$ F)	Case dimensions $d \times l$ (mm)						
100							18 × 30
150							18 × 30
220						18 × 30	18 × 40
330						18 × 30	22 × 40
470					18 × 30	18 × 40	25 × 40
680					18 × 30	22 × 40	
1 000				18 × 30	18 × 40	25 × 40	
1 500			18 × 30	18 × 40	22 × 40		
2 200			18 × 30	22 × 40	25 × 40		
3 300		18 × 30	18 × 40	25 × 40			
4 700	18 × 30	18 × 40	22 × 40	25 × 40			
6 800	18 × 40	22 × 40	25 × 40				
10 000	22 × 40	25 × 40					
15 000	25 × 40						

Type B 43 534

$U_R$ (V-)	200	385
$C_R$ ( $\mu$ F)	Case dimensions $d \times l$ (mm)	
47	18 × 30	18 × 40
68	18 × 40	22 × 40
100	22 × 40	25 × 40
150	22 × 40	25 × 40
220	25 × 40	

The capacitance and voltage ratings listed above are available in different cases upon request. Other voltage and capacitance ratings are also available upon request.




**B 41 534**  
**B 43 534**

**Not for new design**

**Technical data and ordering codes**

$U_R$	$C_R$	Case dimensions $d \times l$ mm	$R_{ESR, typ}$ 20 kHz 20 °C mΩ	$R_{ESR, max}$ 20 kHz 20 °C mΩ	$Z_{max}$ 200 kHz 20 °C mΩ	$I_{-max}$ 20 kHz 40 °C A	$I_{-R}$ 20 kHz 85 °C A	Ordering code <sup>1)</sup>
V-	μF							Short code
<b>B41534-</b>								
6,3	4 700	18 × 30	27	31	30	6,3	2,2	-A2478-M
	6 800	18 × 40	22	26	26	7,7	2,6	-A2688-M
	10 000	22 × 40	19	23	24	9,0	3,1	-A2109-M
	15 000	25 × 40	17	20	22	10,0	3,6	-A2159-M
10	3 300	18 × 30	27	32	30	6,2	2,1	-A3338-M
	4 700	18 × 40	23	27	27	7,6	2,6	-A3478-M
	6 800	22 × 40	19	23	24	9,0	3,1	-A3688-M
	10 000	25 × 40	17	21	22	10,0	3,5	-A3109-M
16	1 500	18 × 30	35	41	37	5,5	1,8	-A4158-M
	2 200	18 × 30	28	33	31	6,1	2,1	-A4228-M
	3 300	18 × 40	23	27	26	7,6	2,6	-A4338-M
	4 700	22 × 40	19	23	24	9,0	3,1	-A4478-M
	6 800	25 × 40	17	21	22	10,0	3,5	-A4688-M
25	1 000	18 × 30	32	37	36	5,8	2,0	-A5108-M
	1 500	18 × 40	25	30	30	7,2	2,4	-A5158-M
	2 200	22 × 40	21	25	26	8,6	3,0	-A5228-M
	3 300	25 × 40	18	22	23	9,9	3,4	-A5338-M
	4 700	25 × 40	16	20	22	10,0	3,6	-A5478-M
40	470	18 × 30	44	50	44	5,0	1,7	-A7477-M
	680	18 × 30	34	39	36	5,6	1,9	-A7687-M
	1 000	18 × 40	27	32	30	7,0	2,4	-A7108-M
	1 500	22 × 40	22	26	26	8,5	2,9	-A7158-M
	2 200	25 × 40	19	23	23	9,7	3,3	-A7228-M
63	220	18 × 30	57	65	54	4,4	1,5	-A8227-M
	330	18 × 30	42	48	42	5,1	1,7	-A8337-M
	470	18 × 40	33	38	35	6,4	2,2	-A8477-M
	680	22 × 40	27	31	30	7,7	2,7	-A8687-M
	1 000	25 × 40	22	26	26	9,1	3,1	-A8108-M

1) For instructions on how to determine ordering codes, refer to [page 261](#).



Technical data and ordering codes

$U_R$	$C_R$	Case dimensions $d \times l$ mm	$R_{ESR, typ}$ 20 kHz 20 °C mΩ	$R_{ESR, max}$ 20 kHz 20 °C mΩ	$Z_{max}$ 200 kHz 20 °C mΩ	$I_{-max}$ 20 kHz 40 °C A	$I_{-R}$ 20 kHz 85 °C A	Ordering code <sup>1)</sup>  Short code
-------	-------	---------------------------------------	---	---	-------------------------------------	------------------------------------	----------------------------------	---

**B41534-**

100	100	18 × 30	90	115	85	2,9	1,0	-A9107-M
	150	18 × 30	65	77	62	3,5	1,2	-A9157-M
	220	18 × 40	48	55	48	4,4	1,5	-A9227-M
	330	22 × 40	36	40	37	5,2	1,8	-A9337-M
	470	25 × 40	28	32	31	7,0	2,4	-A9477-M


**B43534-**

200	47	18 × 30	520	1300	1100	1,1	0,36	-A476-M
	68	18 × 40	360	900	780	1,6	0,55	-A686-M
	100	22 × 40	250	630	540	2,1	0,71	-A107-M
	150	22 × 40	170	430	360	2,5	0,86	-A157-M
	220	25 × 40	120	300	250	3,5	1,2	-A227-M
385	47	18 × 40	440	1100	950	1,5	0,51	-E476-M
	68	22 × 40	310	780	670	1,9	0,63	-E686-M
	100	25 × 40	210	530	460	2,6	0,89	-E107-M
	150	25 × 40	150	380	310	3,1	1,1	-E157-M

1) To obtain the required ordering code, prefix the type number to the short code. E. g.: B43534-A9107-M

B41534-... ( $U_R = 6,3 \dots 100 \text{ V-}$ );

B43534-... ( $U_R = 200 \dots 385 \text{ V-}$ )




B 41 534  
B 43 534


Not for new design

**Useful life**


versus ambient temperature  $T_A$  under ripple current operating conditions <sup>1)</sup>

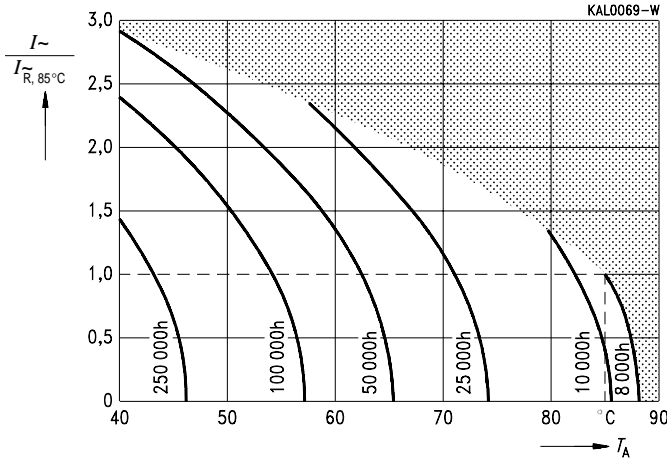


**Permissible ripple current  $I_r$**   
versus frequency  $f$   
Typical behavior

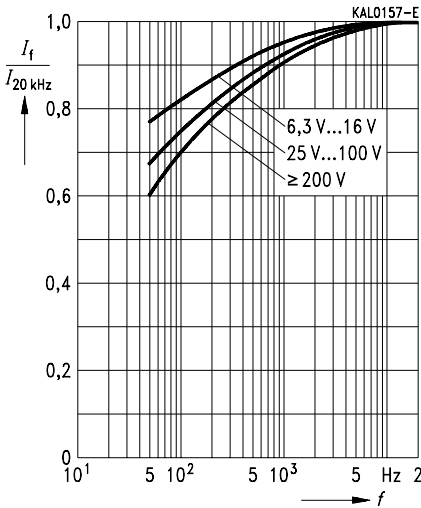


**Series capacitance  $C_s$  at  $f = 100$  Hz**  
versus temperature  $T$   
Typical behavior

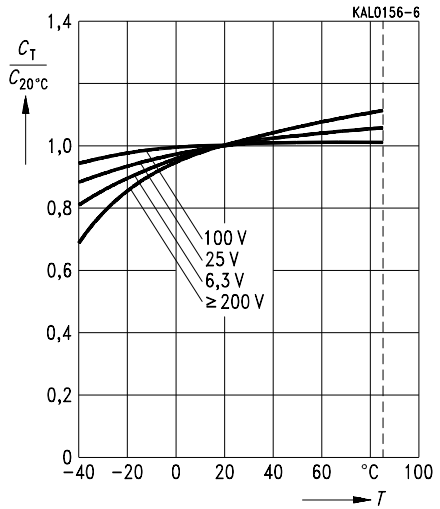


1) Refer to [page 34](#) for an explanation on how to interpret the useful life graphs.




**Equivalent series resistance  $R_{ESR}$**   
at 100 Hz versus temperature  $T$   
Typical behavior

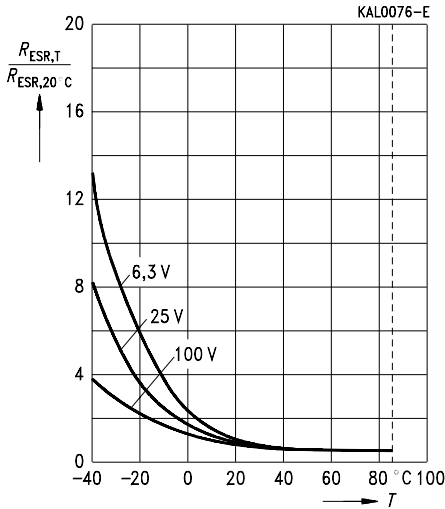

**Equivalent series resistance  $R_{ESR}$**   
versus frequency  $f$   
Typical behavior

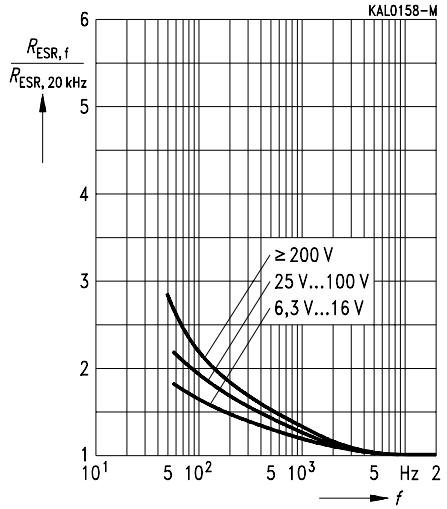

**Impedance  $Z$**   
versus frequency  $f$   
for  $U_R = 25 V$  – at  $20\text{ }^\circ C$   
Typical behavior

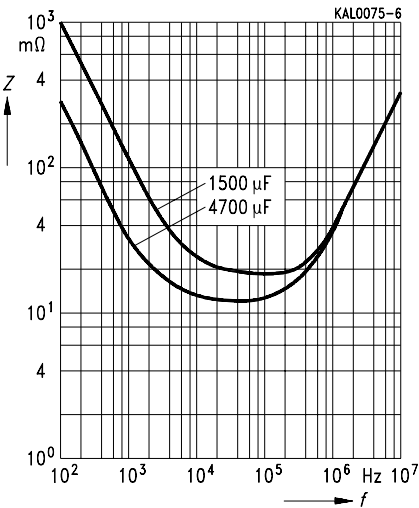

**Impedance  $Z$  at 20 kHz**  
versus temperature  $T$   
Typical behavior

